

ENOC VULCAN 700X SUPER 15W-40

PRODUCT DESCRIPTION

ENOC VULCAN 700X SUPER 15W-40 is blended with advanced technology additive packs and new generation hydrofinished base oils. A High Performance diesel engine oil exceeding the requirements of API CH-4 standard is available in a shear stable viscosity grade. **ENOC VULCAN 700X SUPER 15W-40** offers the excellent performance for fleet operators wanting long engine life in modern long haul diesel trucks operating with low emission engine standards meeting Euro 4* and for extended drain periods.

*: Euro 4 diesel engines without DPF & aftertreatment devices. For those engines fitted with aftertreatment devices, ENOC recommends Vulcan Green 10W-40


APPLICATIONS

- Mixed fleets of automotive diesel truck manufacturers.
- Modern low emission high performance automotive diesel engines upto Euro 4[⋆].
- All vehicle makes used in long distance transport with extended oil drain capabilities.
- Heavy duty Mobile Plant vehicles
- Diesel generator sets requiring API CH- 4 oils

PERFORMANCE STANDARDS

ENOC VULCAN 700X SUPER 15W-40 exceeds the specifications of:


CH-4/SJ	Renault	RVI RLD/RLD-2
E7	Cummins	20076
228.3	MAN	M 3275
VDS-3	CAT	ECF-1a
EO-N	MTU	Type 2.0
	E7 228.3 VDS-3	E7 Cummins 228.3 MAN VDS-3 CAT

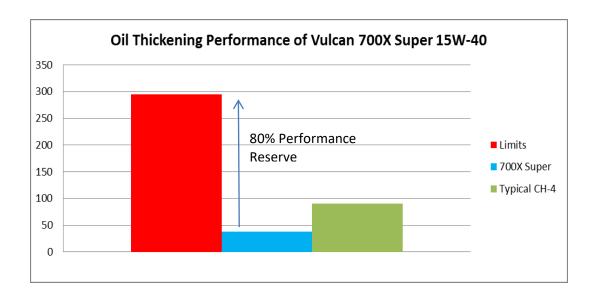

Printed by ENOC Marketing LLC, Dubai, U.A.E. Last Updated on: March 2014- RA

PDS V1011116



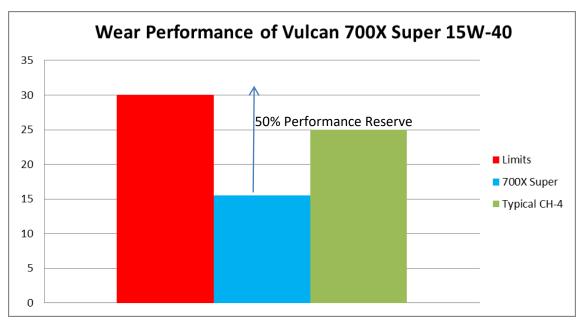

Always follow equipment manufacturer's recommendations for required lubricant performance levels and oil drain intervals.

BENEFITS

ENOC VULCAN 700X SUPER 15W-40 formulated with hydrofinished baseoils & advanced additives provides:

- Excellent engine cleanliness through advanced cleanguard technology
- Superior resistance to oil thickening/ sludge formations, outstanding deposit control and improve engine life.
- Mixed fleet capabilities
- ♦ Exceptional low engine wear
- Trouble free operation between long drain service intervals

Technical Data		
SAE Grade	15W- 40	
Kinematic Viscosity		
mm ² /s @ 40°C	108.3	
mm ² /s @100°C	14.6	
Viscosity Index	138	
Flash Point, COC, °C	232	
Pour Point, ⁰ C	-30	
BN No. ASTM D2896	9.5	
Product Code	200064	

The information prepared provides the typical properties that are considered as representative. Some variation which will not affect performance is possible

HEALTH AND SAFETY, ENVIRONMENT

The information on this product is available in the ENOC Material Safety Data Sheet (MSDS) as a guide to the precautions and safe handling of this product and its disposal. For further information we recommend you review the MSDS. Handled correctly there are no special precautions suggested.

PDS V1011116